

# How to Disassemble a Garden Lounger

## In case of narrow access

The following steps are used to disassemble a garden lounger if the access to your garden or terrace is less than 96 cm.

**Note:** If your access is between 75 cm and 96 cm wide, and you have clear space through all openings (e.g., no narrow corridors or walkways), it is usually sufficient to dismantle the canopy alone. In this case, there's no need to disassemble the sides of the lounger.

For instructions on dismantling the canopy only, please refer to our website:

<https://www.mygind.co.uk/faq.html>.

If you need to dismantle one or both sides, please follow the instructions below:

### Tools Needed

- 1 spanner (size 17) (to remove back bolt)
- 1 small sized flat screwdriver (to remove fabric staples)
- 1 needle nose or wire clipper (to remove fabric staples)
- 1 battery-powered screwdriver with the following bits:
  - Phillips (medium and large size)
  - Torx T25 and T30

This is a **2-person job**: one person to handle the majority of the work and the second person to assist in holding the canopy. Often, one person experienced with a screwdriver can manage most of the task, with the customer helping as needed.

**Expected Time:** Approximately 1 hour



# How to Disassemble a Garden Lounger


## In case of narrow access

mygind design

SCANDINAVIA

### Prepare the Lounger for Disassembly

- 1. Remove the Seat:** Open the lounger to the third position and pull the seat forward.
- 2. Empty the Bottom Drawer:** Take out all items stored inside, such as the leg rest, cover, and tables. Remove any loose pillows as well.
- 3. Remove Fabric Staples:** Detach the fabric staples located under the seat. These staples do not need to be reapplied, as they will remain hidden beneath the seat.
- 4. Now you are ready to disassemble the sides.** Please notice that in many cases its only needed to take one side of off to clear the narrow opening. So consider this before taking both sides off.

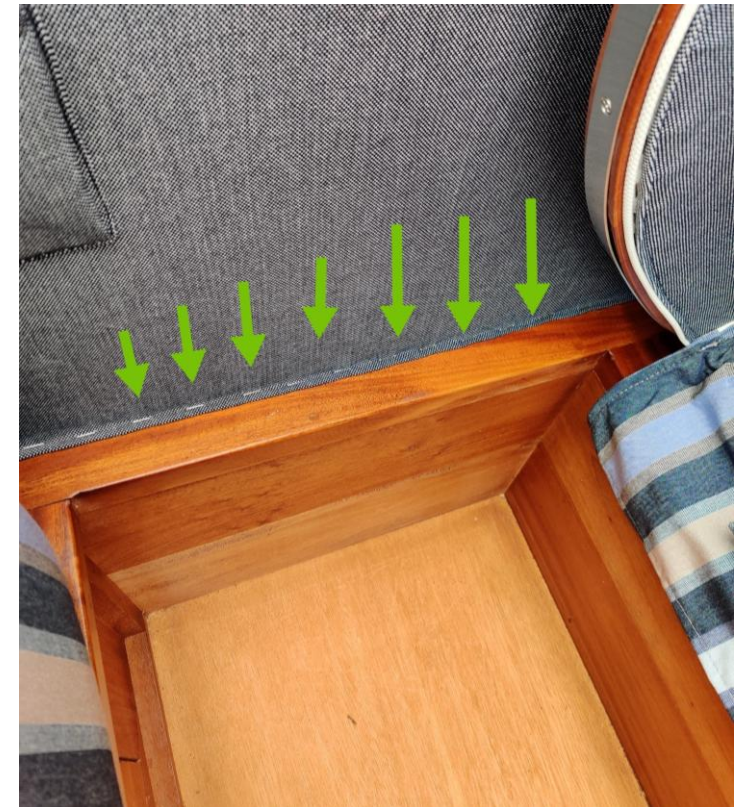

## How to Disassemble a Garden Lounger In case of narrow access

1. **Release the lifter kit.** Unclip the lifters from the main lounger base as shown in the video on page 1
2. **Adjust the Canopy:** Move it to the most upright position (second hole on the rails).
3. **Remove the 3 Back Bolts:** Use a size 17 spanner to unscrew the two bolts on the back.
4. **Detach Canopy:** Lift the canopy forward or backward, then lay it gently on its back.

mygind design


SCANDINAVIA



*If using a power tool, ensure it's set to low momentum to avoid overtightening, or hand-tighten all screws instead.*

## How to Disassemble a Garden Lounger In case of narrow access

- 5. Unscrew Side Handles:** Remove the two side handles. Mark where the screws go through the wood for easier reassembly.
- 6. Remove Corner Brackets:** Detach the front and back corner brackets. Note: Under each bracket, there's a hidden side screw.
- 7. Take Out Wooden Plugs:** Carefully remove the two wooden plugs using a knife blade, thin screwdriver, or pincers. (It's okay if they get damaged—replacements are available.)

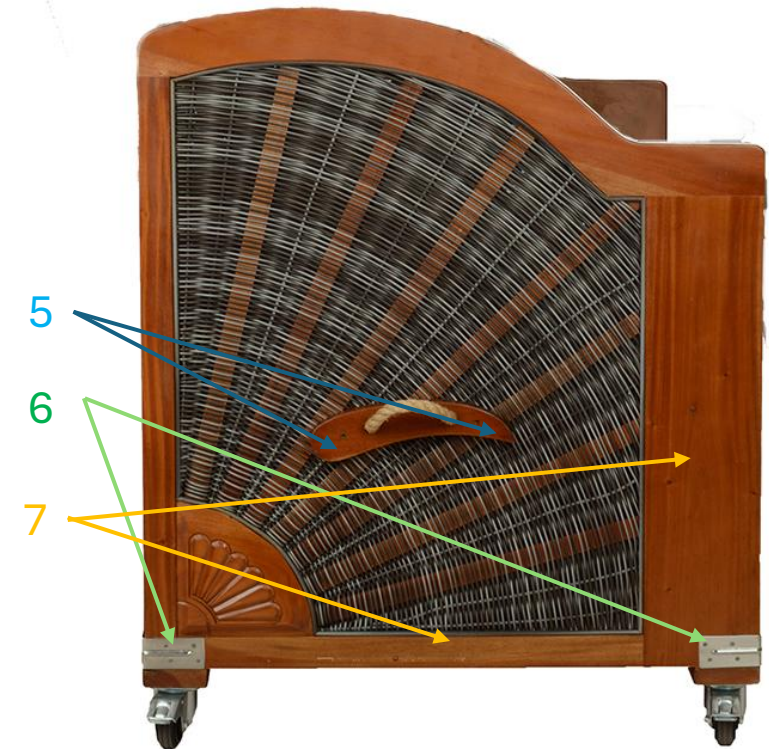

mygind design

SCANDINAVIA

*If using a power tool, ensure it's set to low momentum to avoid overtightening, or hand-tighten all screws instead.*

## How to Disassemble a Garden Lounger In case of narrow access

8. **Tilt the Lounger:** Lock the back wheels and tilt the lounger onto its back.
9. **Unscrew Wheel Screws:** Remove only the two outer screws from each wheel.
10. **Raise the Lounger:** Carefully return the lounger to its upright position on its wheels.

mygind design

SCANDINAVIA




*If using a power tool, ensure it's set to low momentum to avoid overtightening, or hand-tighten all screws instead.*

## How to Disassemble a Garden Lounger In case of narrow access

- 11. Detach Side Panel:** Unscrew the four side screws to remove the side panel.
- 12. Transport the Parts:** Carry all disassembled parts to the garden and follow the reassembly instructions on the next page.

mygind design

SCANDINAVIA

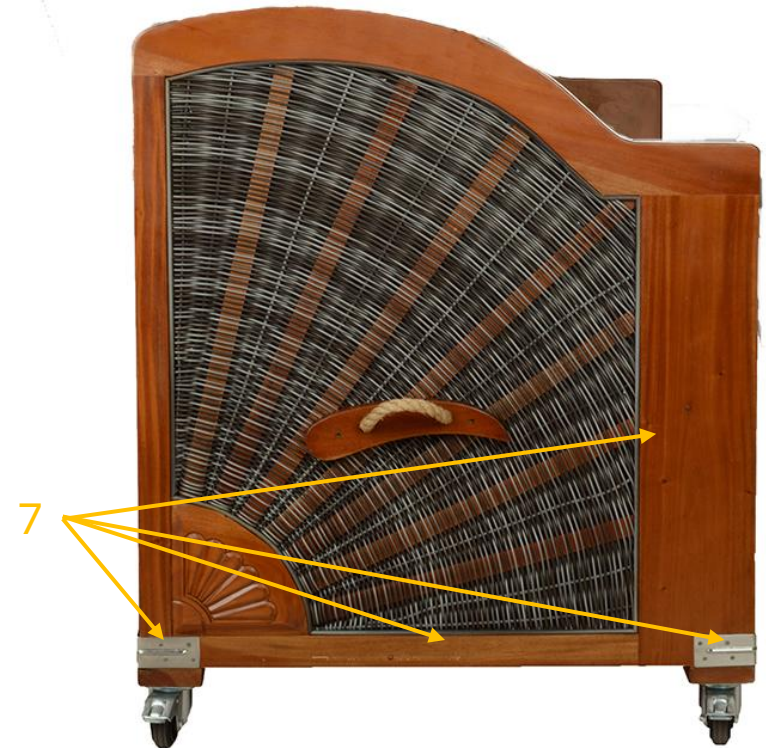

*If using a power tool, ensure it's set to low momentum to avoid overtightening, or hand-tighten all screws instead.*

## How to Assemble a Garden Lounger

mygind design

SCANDINAVIA

- 1. Pre-attach the two handles** to the sides.  
Ensure the screws are flush with the inside of the sides.
- 2. Secure the four side screws** to attach the sides firmly.  
Then screw in the side handles fully
- 3. Tilt the lounger backwards** and screw in the wheels.
- 4. Attach the front corner brackets** securely.
- 5. Return the lounger to its upright position**  
and screw in the back corner brackets.
- 6. Place the hood on top,**  
aligning it so the bottom of the hood rests on the brackets.  
Lock the two side handles in the second hole position from  
the front.
- 7. Attach the two bolts**—make sure they go in smoothly.  
Hand-tighten them first, then lightly tighten them using a tool.
- 8. Insert the four wooden plugs** to hide the two screw holes on  
each side. Tap them lightly with a hammer to secure them.



*If using a power tool, ensure it's set to low momentum to avoid overtightening, or hand-tighten all screws instead.*